


Features

- ET # -. //
- ET 10) +2 !0
- ET !0) +2 !0
- ET +
- ET 2 +
- ET 3
- ET 4 +
- ET 5 /
- ET 6 +
- ET * ,)



Mechanical Data

- ET Case: (plastic package).
Lead free; RoHS compliant
- ET Molding Compound Flammability Rating:
UL 94 V-0
- ET Terminals: High temperature soldering guaranteed:
260 °C/10 sec. at terminals

Applications

- ET USB3.0, Firewire, DVI, HDMI, S-ATA
- ET Thunderbolt, Display Port
- ET Mobile HDMI Link, MDDI, MIPI, SWP / NFC

Absolute Maximum Ratings

Ratings at 25 °C, ambient temperature unless otherwise specified

	%		
8 2 ++ - # -. //	///	!0	
8 2 ++ # -. //	///	!0	
8 2 ++ % +	% <	W R	
8 2 ++ +	&	!! A !	
8 2 ++ +	6	.	


Electrical Characteristics

(T_A = 25 °C unless otherwise specified)


	%	!))*	,
<	<	///			
		# -. // 10			
- +	-	# -. // 10			
6 3	#	- * +			
-	-	<?) ? 87>			4

\$ 7ULJJHU DQG FODPSLQJ YROWDJH DUH PHDVXUHG SHU , (& .9 FRQWDFW GLVFKDUJH PH
\$IWUHQWLDLQJLJMKHPSVRUWHIFSFORRQWLQXRXWUHLWPHD[LXPXOHFNLUHCHWKDQ\$

(6' & ODPSLQJ 7HVW

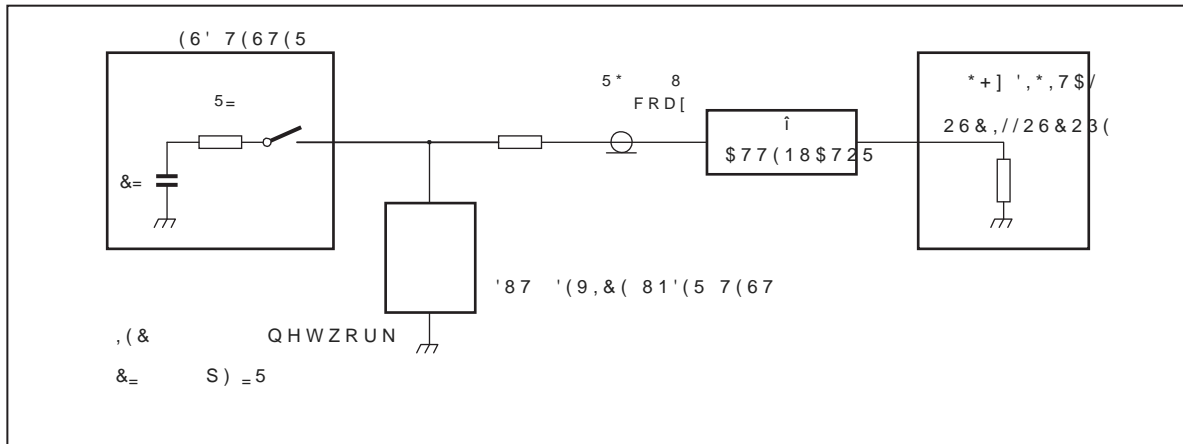


7\SLFDO (6' 5HVSRQVH
, (& .9 FRQWDFW GLVF Typical Device Capacitance VS. Frequency

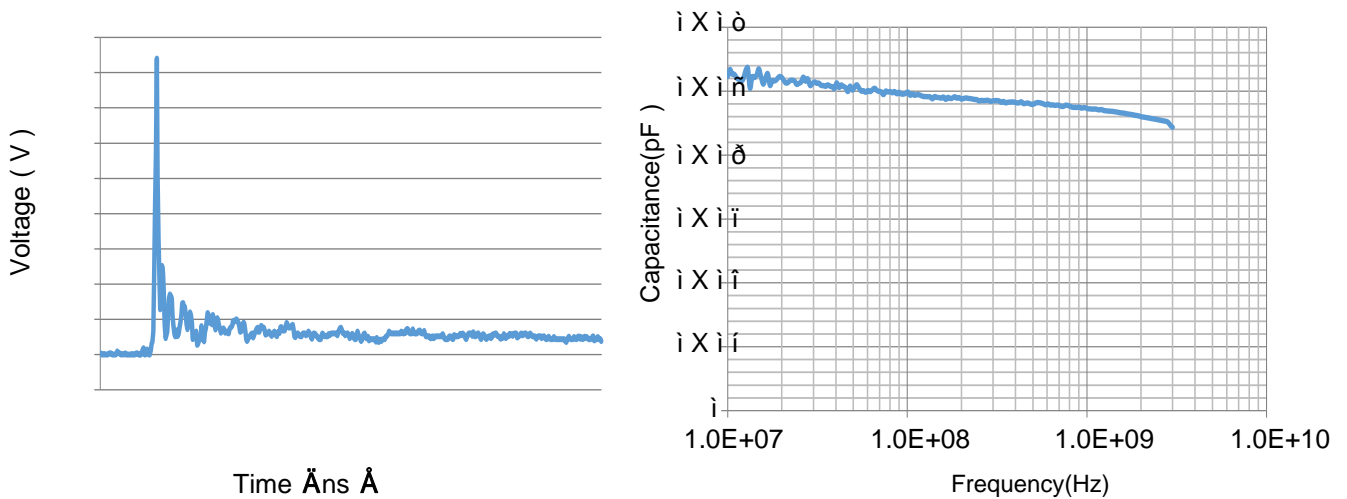

(6' 3URWHFWLRQ IRU 6LJQDO /LQH


7KH (6' LV GHVLJQHG IRU WKH SURWHFWLRQ RI RQH ELGLUHFWL
 „ 3ODWH (6' DFORVH WR WKH RQVWHVWV RULHQDOH
 „ 0LQLPL]H WKH SDWK O& (GJVDQEHWKZHSURWKHF WHG VLJQDO OLC
 „ 8VH JURXQG SODQHV ZKHQHYHU SRVVLEOH

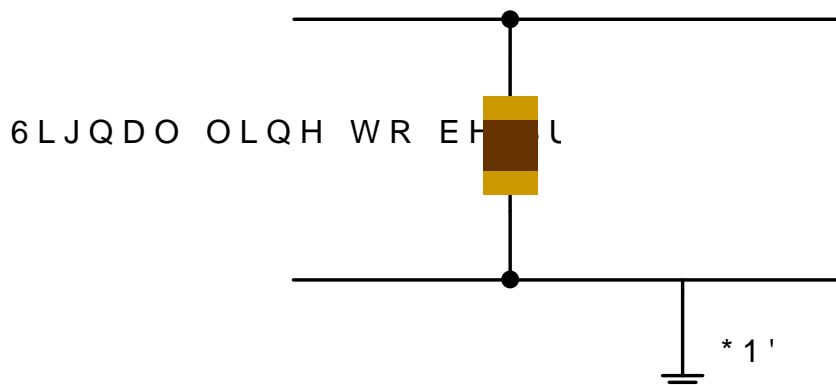

3UR G X F W ' L P H Q V L R Q

' LP	P L O H O V P H U V
	P L Q P D [
\$	
%	
&	
,	
(5 ()
)	
*	% 6 &
+	

3\$' ' L P H Q V L R Q

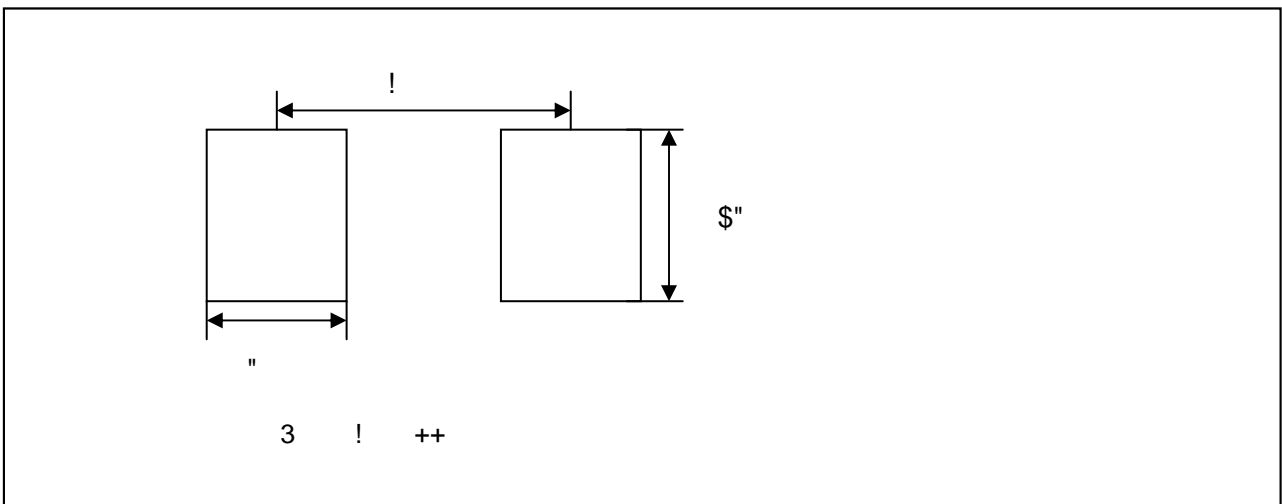

2UGHULQJ LQRUPDWLRQ

PESD1842U005		Tape and reel	1 000pcs / reel
--------------	--	---------------	-----------------

! & J 6 ! " 6 K
 1 8 Q'0% '0*00'%
 Q'0% ')>>' ;